

# 43"UHD Monitor(R1500)



## Features:

43"16:9 LED Backlight Monitor,3840x2160 resolution  
1200:1 contrast ratio,89/89/89/89 view angle  
R1500 curved monitor  
CE, FCC



Wide view angle



HDMI



R1500 Curved



2 years warranty



DP

## Specification:



Screen diagonal dimension: 43 inch  
Pixel Pitch: 0.2451x0.2451mm  
Active Area 921.65x529.42mm  
Screen Maximum Resolution: 3840x2160  
Color Depth: 10-bit(D), 1.07 Billion colors  
Brightness: 450 cd/ m<sup>2</sup>  
Monitor Aspect Ratio: 16:9  
Contrast Ratio: 1200:1  
View Angle H/V(degrees): 178°/178°  
Connector:DP+HDMI  
OSD Languages:Multi Languages  
VESA Mounting Pattern:200x200mm  
Net weight: 32KG  
Gross Weight: 36KG  
Power- Watts(on and standby): < 65W  
Power input : 100-240V,AC,50/60Hz  
Operating Temperature: 0 °C ~ 40 °C  
Storage Temperature: -20 °C ~ 60 °C  
Operating Humidity: 10 ~ 85%  
Certifications: CE,FCC



版权所有：侵犯必究



版本	标记	变更内容	签名
----	----	------	----

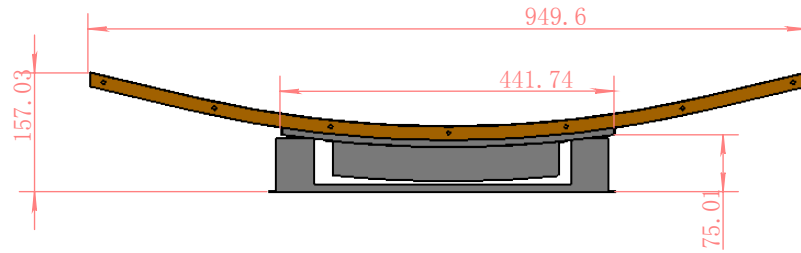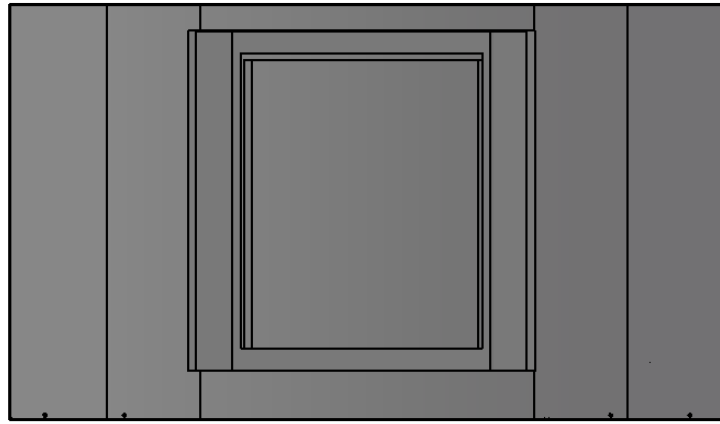

工艺流程  
 数冲  
 ↓  
 折弯  
 ↓  
 压铆  
 ↓  
 焊接  
 ↓  
 打磨  
 ↓  
 喷涂  
 ↓  
 入库  
 ↓  
 装配  
 ↓  
 包装

- 技术要求：  
 1. 未注折弯角度为 $90^\circ \pm 0.1$ 。  
 2. 未注折弯内角半径 $R \leq 1$ 。  
 3. 未注倒角为R2。  
 4. 表面不允许有划伤、碰伤、变形等缺陷。

产品名称				数量	1 /套		经许可不得复制及转借				
客户名称				材料	$\delta =$						图号
批准	审核	未注公差	0-100	$\pm 0.1$	零件名称： 装配体2		表面处理	黑色砂纹			
			100-500	$\pm 0.2$							
设计	刘	角度公差	500-1000	$\pm 0.3$	更改日期		版本	00			
			1000-2000	$\pm 0.5$							
工艺	刘	投影标记		2020/3/13	比例	1:10		weight	5.101kg	第1页 共1页	

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26